

ZKIP4 WDR series

Cube IP camera

H.264 • WDR • 1 Megapixel • Full HD

Features:

- Super video quality, HD up to 720P
- WDR function and Array IR LED
- Dual H.264 streams
- Microphone and speaker
- Built-in POE and WIFI(Optional)
- On board storage



Product Description

ZKIP4 series comes with compact and elegant appearance. It is designed for easy and flexible installation.

It supports 1 megapixel (1280*720) resolution, delivering super H.264 compression image quality up to 25 fps. WDR function and embedded Array LED enable the camera to get good image quality in dark environment. Dual video streams can be delivered simultaneously in different resolutions, frames rates and image qualities for monitoring on different platforms.

ZKIP4 series supports built-in microphone and speaker to

realize two-way audio. This can allow remote listening in on an area, as well as communication with individuals directly.

ZKIP4 series also can support POE(Optional), WIFI(Optional), SD card on-board storage and two way audio. With embeded IE webserver function, you can visit the front-end camera very conveniently. Besides, the user password access function will ensure high security.

ZKIP4 WDR series

www.zktechnology.eu


Technical Specifications

Product Model	ZKIP472
Product Name	Megapixel Cube IP camera
Camera Performance	
Image Sensor	1/3" megapixel WDR progressive CMOS
Image Resolution	1280*720
Minimum Illumination	0.05 Lux (IR off) , 0 Lux (IR on)
Day/Night Mode	Automatically IR-cut filter
Lens Type	6 mm fixed lens
IR	Embedded Array IR LED
Video	
Video Compression	H.264 main profile level 3
Video Resolution	Main stream: 1280*720 Secondary stream: 320*240
Video Frame Rate	1~25 frame settable
Image settings	Brightness, contrast, saturation, color, up/down, left/right, WDR on/off
Audio	
Audio Streaming	Two-way
Audio Compression	G.726/G.711
Audio Input	1 channel line/Mic input
Audio Output	1 channel line output
Network	
Security	Multi-level users access with password protection
Network Interface	10Base-T/100Base-TX Ethernet interface WIFI 802.11b/g/n wireless network (optional)


Supported Protocol	TCP/IP, HTTP, UDP, ARP, SMTP, FTP, DHCP, DNS, DDNS, NTP, UPNP, RTSP/RTCP/RTP
On board storage	
Card slot	Supports TF Card, up to 32G
Storage	Snapshots and video clips
Alarm and Event Management	
Alarm Input	N/A
Alarm Output	N/A
Motion Detection	4 independent detection areas settable
RS485 port	N/A
Alarm Trigger	Video lost, motion detection, external input
Alarm Events	File upload via FTP, HTTP and email; motification via email, HTTP and TCP; external output activation; video and audio recording to edge storage; pre- and post-alarm video buffering
General	
Casing	Camera: Plastic for front Metal for back(Aluminum Alloy) Color: Dark grey and White
Power Supply	12V DC 1.5A POE: 802.3af POE standard (optional)
Power Consumption	8 W max
Working Conditions	-10°C ~ 55°C, 10~95 % RH
Weight	N.W.: 0.16 KGS G.W.: 0.58 KGS
Warranty	12 Months

Product dimension figure

(Remark: all the dimensions are in mm)

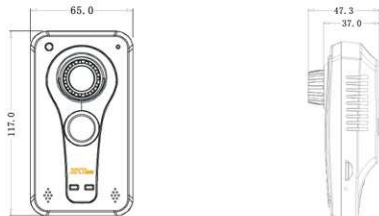

Interface figure



Standard accessories



ZKVISION Software(Included in CD)



Power supply



Bracket



CD